

PRODUCT OVERVIEW

The G-Disc Sub is a tool designed to be ran as part of the tubing string when a pressure barrier is required. It utilizes a ceramic dome to provide a reliable and economic method to contain pressure and is easily removed once it is no longer required.

It is commonly used for many different applications including”


- TCP Operations
- Snubbing Operations
- Setting Hydraulic Packers
- Tubing Testing

Standard Version rated to 250°F
 Standard Version rated to 10,000 psi

Premium threading available
 High-Temp elastomers available

FEATURES & BENEFITS

- Compact and simple field proven design
- Cost effective
- Re-dressable

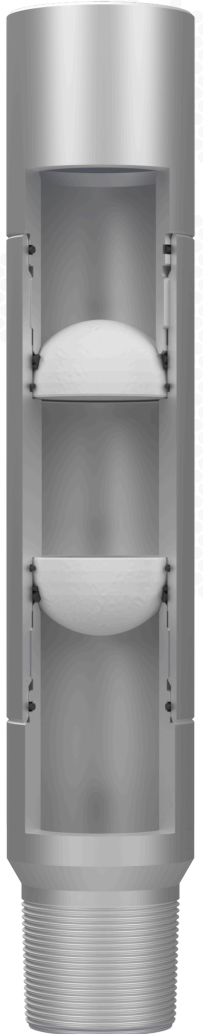

SPECIFICATIONS

Tubing Size		Maximum OD		Minimum ID		Pressure Rating		Length	
in.	mm	in.	mm	in.	mm	psi	mPa	in.	cm
2 3/8	60.3	3.062	77.77	1.995	50.67	10,000	69	12.1	30.73
2 7/8	73.0	3.656	92.86	2.441	62.00	10,000	69	12.6	32.00
3 1/2	88.9	4.500	114.3	2.992	76.00	10,000	69	13.5	34.29

